


70 Series Impact Printer

Meet the Ithaca® Series 70 impact printer The Series 70 takes the gamble out of consistent, quality impact printing for video lottery, poker, keno, and other unattended printing applications. Confidence in a printer's paper delivery system is the name of the game, and the Series 70 delivers receipts, tickets and coupons at 4.9 lines per second with solid consistency. It features enhanced or emphasized font styles for greater legibility, and utilizes Oki™ technology, known worldwide for quality, reliability and a snap-in/snap-out, user-friendly ribbon cassette. The Series 70 even has a convenient Paper Low indicator to alert you before the paper roll runs out. Options include a paper transport mechanism to ensure smooth delivery, and a large 6-inch diameter paper roll for fewer paper roll changes. Plus a standard 1-year warranty with extended maintenance options. And, of course, the Series 70 is backed by Ithaca's solid reputation for quality and reliability.

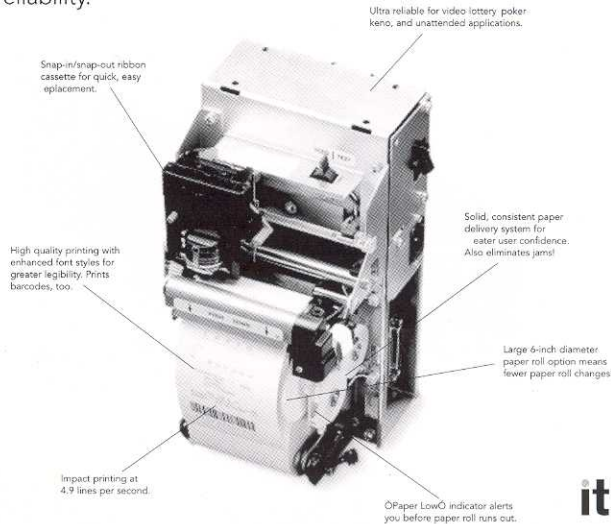

ithaca
a product of TRANSACT

OUR MODELS

- 75 Receipt Only/Full Cut (printer engine with base)
- 76 Receipt/Journal/Full Cut (printer engine with base)

OUR PRINTING CHARACTERISTICS

Style	Pitch (char./in.)	Maximum (char./line)	Maximum Speed (char./sec.)
Pica	10	24	220
Elite	12	28	220
Condensed	17.1	40	220

OUR INTERFACE OPTIONS

- RS232 Serial (25-Pin)
- Centronics Parallel (36-Pin)

OUR OPTIONS

- Paper Transport
- 6O Diameter Paper Roll Bucket (M75)
- Paper Cover
- Special Character PROMS

OUR POWER REQUIREMENTS

Standard (Internal Supply): 110/120 VAC, 60 Hz
Optional (Internal Supply): 220/240 VAC, 50/60 Hz

OUR RELIABILITY

Printer in full operation (using all available features)*

MTBF: 25,000 Hours

Printhead: 200,000,000 Characters

Auto-Cutter: 1,000,000 Cuts

*Reliability data is based on Ithaca standard test conditions.

OUR ENVIRONMENTAL SPECS

Operating Temperature:

0 to +50 degrees C (32 to +122 degrees F)

Operating Humidity:

10 to 90% RH non-condensing

OUR REGULATORY COMPLIANCE

FCC Class A CSA 220 CE Mark
UL 1950 VDE 950

OUR SUPPLIES AND SERVICE

Ithaca offers convenient one-stop shopping for all your printer needs—paper, spare parts, manuals, printer servicing/refurbishment and more. For more information, call us at 1.877.7ithaca or visit our Web site at www.transact-tech.com.

OUR FEATURES AND BENEFITS

- All Printers are Mechanisms with Drive Electronics
- Print Speed: 4.9 lps. N On Standard Test Receipt
- One-Year Standard Warranty: Extended Maintenance Plan Available
- Data Buffer: 2K
- Auto-Cutter (Full Cut): 82.5 mm (3.25 in.)
- CPI: 5, 6, 8.5, 10, 12, 15, 17.1, 24
- Print Zone: 60 mm (2.34 in.)
- Self-Test: Test Ticket
- Low 37W Power
- Paper Low Indicator
- Character Sets: 2 ASCII (slashed & and unslashed 0), IBM Character Sets I and II, French, French Canadian, Spanish, German
- Barcodes: Code 128, Interleaved 2 of 5, Interleaved 3 of 9

OUR MEDIA

Standard Paper Roll N M75 (one-ply):

- Width: 82.5 mm (3.25 in.)
- Diameter: 89.0 mm (3.5 in.) or optional 152.0 mm (6 in.)
- One-ply Maximum Thickness: .11 mm (.0045 in.)
- Length Per Roll (3.5 in. dia.): 74.6 m (245 ft.)
- Length Per Roll (6 in. dia.): 148.8 m (488 ft.)

Standard Paper Roll N M76 (two-ply):

- Width: 82.5 mm (3.25 in.)
- Diameter: 89.0 mm (3.5 in.)
- Maximum Thickness Per Ply: .09 mm (.0035 in.)
- Length Per Roll: 38.1 mm (125 ft.)

Ribbons: 3-4.5 Million Character Life

- Ithaca or Genuine Oki Snap-on Ribbon Cassette (Black or Purple)

OUR PHYSICAL CHARACTERISTICS

Dimensions (without transport): 154 mm H x 274 mm L x 172 mm H
(6.06 in. W x 10.75 in. L x 6.75 in. H)

Weight: 3.86 kg (8.5 lbs.)

Shipping Weight: 5.9 kg (13 lbs.)